




Part Number:

**SH-014026-8**

Revision 20170403 - Generated 2017-Apr-03

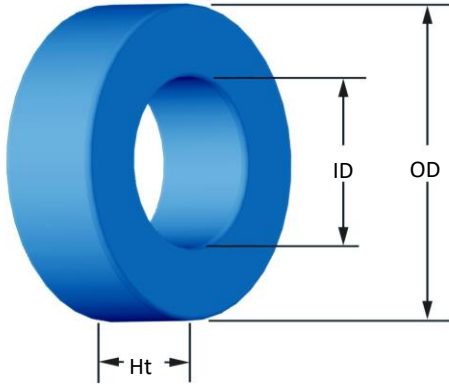

<b>OD</b>	(nom. - bare core) (max. - after coating)	3.56 mm 3.76 mm	0.140 in 0.148 in										
<b>ID</b>	(nom. - bare core) (min. - after coating)	1.78 mm 1.52 mm	0.070 in 0.060 in										
<b>Ht</b>	(nom. - bare core) (max. - after coating)	1.52 mm 1.73 mm	0.060 in 0.068 in										
<b>Mass</b>	(approximate)	0.06 grams											
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.0137 cm <sup>2</sup>											
	L <sub>e</sub> - Eff. Mag. Path Length	0.817 cm											
	V <sub>e</sub> - Eff. Core Volume	0.0107 cm <sup>3</sup>											
	WA - Min. Eff. Window Area	0.0181 cm <sup>2</sup>											
	sa - Surface Area	0.523 cm <sup>2</sup>											
	mlt - mean length per turn	0.646 cm											
<b>Inductance</b>	μ <sub>i</sub> (reference)	26											
	A <sub>L</sub> value (nominal)	5.5 nH/N <sup>2</sup>											
	Test Winding	N=30, #36 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.002 V											
	AL tolerance	±15%											
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=3.287E+08, c=5.779E+06, d=1.240E-14												
	B <sub>pk</sub>	500 G											
	frequency	100 kHz											
	Core Loss (nominal)	277 mW/cm <sup>3</sup>											
Core Loss (maximum)	318 mW/cm <sup>3</sup>												
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=1.042E-06, c=1.701, d=0.000												
	H <sub>DC</sub>	200 Oe											
	Percent Initial Perm.(nom.)	53.9%											
Percent Initial Perm.(min.)	46.1%												
<b>Coating/Pkg</b>	Coating Type:	Parylene N											
	Voltage Breakdown (min.)	500 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	36,000 Pcs/Box											
<b>Winding Table</b>	<b>Wire Size</b>	AWG	30	32	34	36	38	40	42	44	-	-	-
		mm	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	-	-	-
	<b>Single Layer</b>	Turns	11	15	19	25	31	40	50	63	-	-	-
		Rdc(Ω)	24.1 m	52.2 m	105.1 m	219.9 m	433.7 m	890.0 m	1.8	3.5	-	-	-
	<b>Full Winding</b>	Turns	12	18	28	43	67	103	159	247	-	-	-
		Rdc(Ω)	26.2 m	62.6 m	154.9 m	378.3 m	937.3 m	2.3	5.6	13.9	-	-	-

