




Part Number:

**SH-131125-2**

Revision 20170403 - Generated 2017-Apr-03

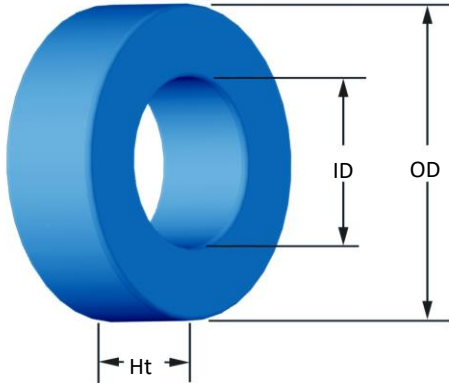

<b>OD</b>	(nom. - bare core) (max. - after coating)	33.02 mm 33.83 mm	1.300 in 1.332 in
<b>ID</b>	(nom. - bare core) (min. - after coating)	19.94 mm 19.30 mm	0.785 in 0.760 in
<b>Ht</b>	(nom. - bare core) (max. - after coating)	8.76 mm 9.70 mm	0.345 in 0.382 in
<b>Mass</b>	(approximate)	26 grams	
<b>Magnetic Dimensions</b>	$A_e$ - Eff. Mag. Cross Section $L_e$ - Eff. Mag. Path Length $V_e$ - Eff. Core Volume WA - Min. Eff. Window Area sa - Surface Area mlt - mean length per turn	0.551 cm <sup>2</sup> 8.15 cm 4.49 cm <sup>3</sup> 2.93 cm <sup>2</sup> 37.8 cm <sup>2</sup> 4.36 cm	
<b>Inductance</b>	$\mu_i$ (reference) $A_L$ value (nominal) Test Winding Frequency Voltage on Agilent 4284A AL tolerance	125 109 nH/N <sup>2</sup> N=70, #22 AWG 10 kHz 0.17 V ±8%	
<b>Core Loss</b>	Core Loss(mW/cm <sup>3</sup> ) = $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$ where $B_{pk}$ expressed in gauss, $f$ expressed in hertz, and: $a=7.985E+09$ , $b=1.378E+09$ , $c=4.041E+06$ , $d=7.891E-15$ $B_{pk}$ frequency Core Loss (nominal) Core Loss (maximum)	1000 G 50 kHz 240 mW/cm <sup>3</sup> 276 mW/cm <sup>3</sup>	
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$ where H expressed in oersteds, and: $a=1.000E-02$ , $b=3.265E-05$ , $c=1.587$ , $d=0.000$ $H_{DC}$ Percent Initial Perm.(nom.) Percent Initial Perm.(min.)	40 Oe 46.8% 39.7%	
<b>Coating/Pkg</b>	Coating Type: Voltage Breakdown (min.) Limit Package Quantity	Blue Epoxy 1000 Vrms 0.1 mA, 5 s 576 Pcs/Box	
<b>Winding Table</b>	<b>Wire Size</b>	AWG	8    10    12    14    16    18    20    22    24    26    28
		mm	3.150    2.500    2.000    1.600    1.250    1.000    0.800    0.630    0.500    0.400    0.315
	<b>Single Layer</b>	Turns	14    18    22    29    36    46    58    73    91    114    142
		Rdc(Ω)	1.3 m    2.6 m    5.0 m    10.5 m    20.6 m    41.9 m    84.1 m    168.3 m    333.7 m    664.9 m    1.3
<b>Full Winding</b>	Turns	15    24    37    57    88    136    211    326    504    780    1,208	
	Rdc(Ω)	1.3 m    3.4 m    8.4 m    20.5 m    50.4 m    124.0 m    305.9 m    751.8 m    1.8    4.5    11.2	

